

Modello Model	JCS-P1502GRS	Centrifuga Centrifugal	Inlet in.	6
			Outlet in.	5

RPM	m ³ /h l/l'	0	72	78	84	96	102	108	120	138	150	165	180	195	210	225	240	255	270	285	300
		0	1200	1300	1400	1600	1700	1800	2000	2300	2500	2750	3000	3250	3500	3750	4000	4250	4500	4750	5000
1450	H - m	88	87,5	87	86	85,4	85	84,2	83	82	81,7	81,5	81	80,5	80	78	75	71	66	56	
	Kw	44,7	44,7	44,7	44,7	48,1	50,7	52,6	56,7	58,3	59,5	61	61,4	62	62,6	64,9	67,1	69,3	70,8	71,6	
1600	H - m	107	107	106	105	105	104	103	102	101	101	101	100	99,7	99	97	95	92	89	84	
	Kw	58,2	58,2	58,2	58,2	60,4	64,9	69,7	72,3	75	76,3	77,5	78	78,5	79	82	85	88	90,2	91,7	
1750	H - m	135	135	135	134	134	133	133	133	133	132	131	130	129	128	126	124	122	119	116	110
	Kw	77,5	77,5	77,5	77,5	77,5	77,5	77,5	77,5	79,8	85,7	89,5	95,4	97,7	104	109	114	119	122	126	130

Numero stadi Stage no.	2
---------------------------	----------

Peso lb. Weight lb.	583
------------------------	------------

Versioni disponibili - Available version

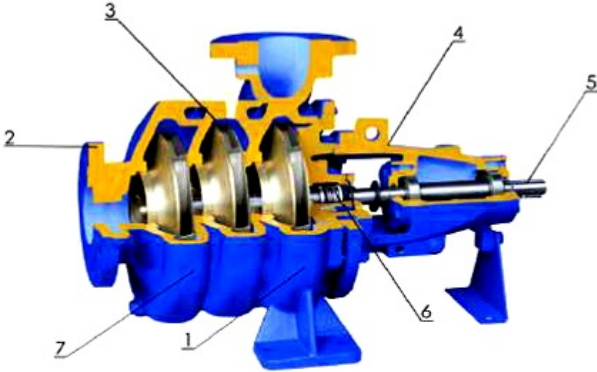
	Parts List	Material
	1 PUMP CASING	Grey fine grained cast iron
	2 SUCTION COVER	Grey fine grained cast iron
	3 IMPELLER	Grey fine grained cast iron
	4 SUPPORT	Grey fine grained cast iron
	5 SHAFT	Steel 38NCD4
	6 MECHANICAL SEAL	
	7 DIFFUSER	Grey fine grained cast iron
	* for not corrosive liquids	



Immagine a scopo illustrativo
Images for illustrative purpose only

Modello
Model

JCS-P1502GRS

Centrifuga
Centrifugal

Inlet in. 6

Outlet in. 5

Curva prestazioni - Performances curve

