

Modello Model		JCS-P653A2S										Centrifuga Centrifugal						Inlet in.	3	
																		Outlet in.	2.5	
RPM	m³/h	0	27	30	33	36	39	42	48	54	63	72	81	87	93					
	l/l'	0	450	500	550	600	650	700	800	900	1050	1200	1350	1450	1550					
1450	H - m	52	50	49	48,3	47	46,8	44	40	36	27									
	Kw	7,1	7,1	7,5	7,9	8,2	8,5	8,9	9,3	10,1	10,6									
1750	H - m	76	74	73	72,6	72	71,1	70	66	62	56									
	Kw	10,8	10,8	11,2	12,4	12,7	13	13,4	14,2	15,3	16,8									
2000	H - m	98	97	96	95,6	95	93,5	92	91	86	81							72		
	Kw	15,7	15,7	15,7	16	16,4	17,2	18,6	19,4	20,9	22,7							24,6		
2200	H - m	120	119	117	117	116	116	115	111	105	104							96		
	Kw	20,1	20,1	20,1	20,9	21,6	22,3	23,1	25,3	26,8	29,1							31,3		
2400	H - m	141	141	140	140	139	139	138	136	133	128							120	110	
	Kw	26,8	26,8	26,8	26,8	26,8	27,7	29,1	30,6	32,8	35,8							38,8	41	
2600	H - m	165	165	164	164	164	164	163	161	159	153							146	135	130
	Kw	34,3	34,3	34,3	34,3	34,3	34,3	34,3	37,3	39,5	44,7						47	50	52,2	
2900	H - m	204	204	204	203	203	203	202	200	197	190	181	167	153	146					
	Kw	47,7	47,7	47,7	47,7	47,7	47,7	47,7	52,2	55,2	61,9	65,6	69,3	71,6	73,8					

Versioni disponibili - Available version

Girante - Impeller

Girante prim. - Prim. Impeller

Diametro - Diameter in.

10

Apertura - Opening in.

0.4

Girante sec. - Sec. Impeller

Diametro - Diameter in.

8

Apertura - Opening in.

0.5

Numero stadi


Stage no.

3

Peso lb.

Weight lb.

198

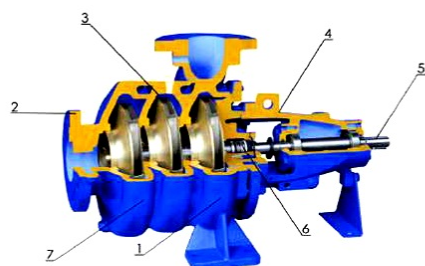

Parts List

- 1 PUMP CASING
- 2 SUCTION COVER
- 3 IMPELLER
- 4 SUPPORT
- 5 SHAFT
- 6 MECHANICAL SEAL
- 7 DIFFUSER

Material

Grey fine grained cast iron
Grey fine grained cast iron
Grey fine grained cast iron
Grey fine grained cast iron
Steel 38NCD4
Grey fine grained cast iron
Grey fine grained cast iron

* for not corrosive liquids



Immagine a scopo illustrativo

Images for illustrative purpose only

Modello
Model

JCS-P653A2S

Centrifuga
Centrifugal

Inlet in. 3

Outlet in. 2.5

Curva prestazioni - Performances curve

