



Technical Data **Centrifugal Self Priming PTO Tractor Pump -** **JCA 4-6281655**

Revision no.

Page:
1

Receiver

From

Company name
 Respons. Department
 Person in charge
 Phone number
 Fax no
 E-mail address



Brand: JMS

Model: JCA 4-6281655



 MADE IN ITALY

Weight

lb.

165

Dimensions:

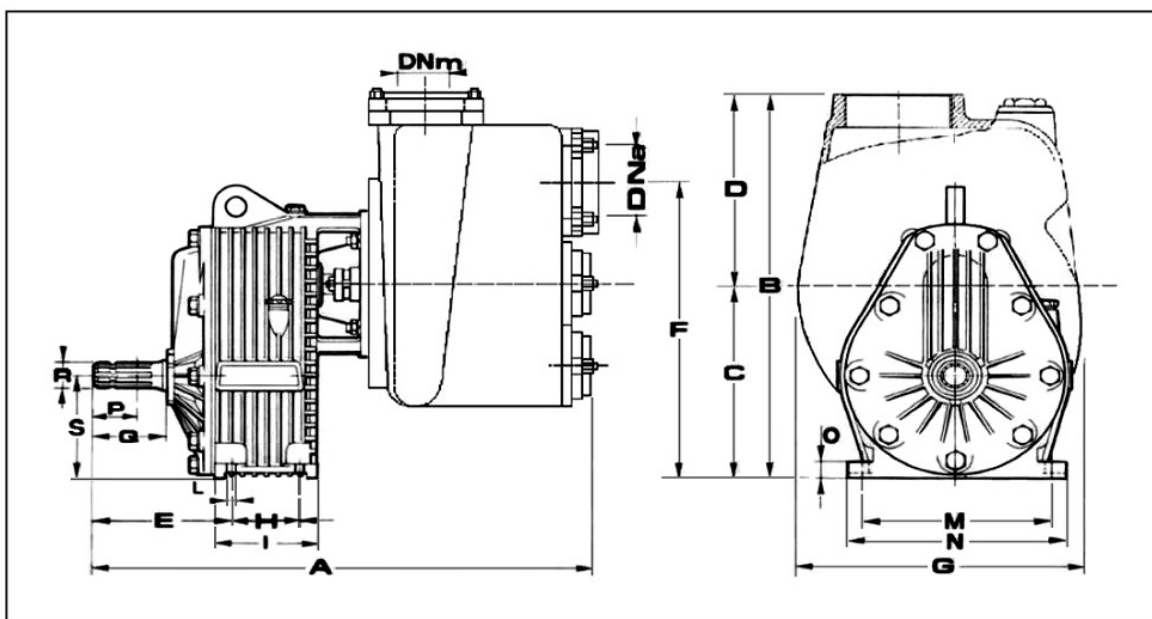

Inlet and Outlet Flange

DNa	DNm
4	4

Pump Installation Size (inch)

A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q	R	S
25	18	9	9	7	12	11	4	6	1	4	5	1	2	3	1 3/8	6

Project

Project ID

Created by

Created on

Last update



Performance Curves **Centrifugal Self Priming PTO Tractor Pump -** **JCA 4-6281655**

Revision no.

Page:


2

Receiver


From

Company name
 Respons. Department
 Person in charge
 Phone number
 Fax no
 E-mail address

Model	HP	R.P.M. PTO	Ratio	R.P.M. Pump	Solid Passage	Capacity						
JCA 4- 6281655	40	540	1 : 6.28	3390	in.	Gal/Min	220.1	308	396.3	528.3	607.6	660.4
					1.8	Ft.	108.3	101.7	96.8	88.6	75.5	65.6
						Cv ass.	20	23.5	24.8	27.8	28.9	29

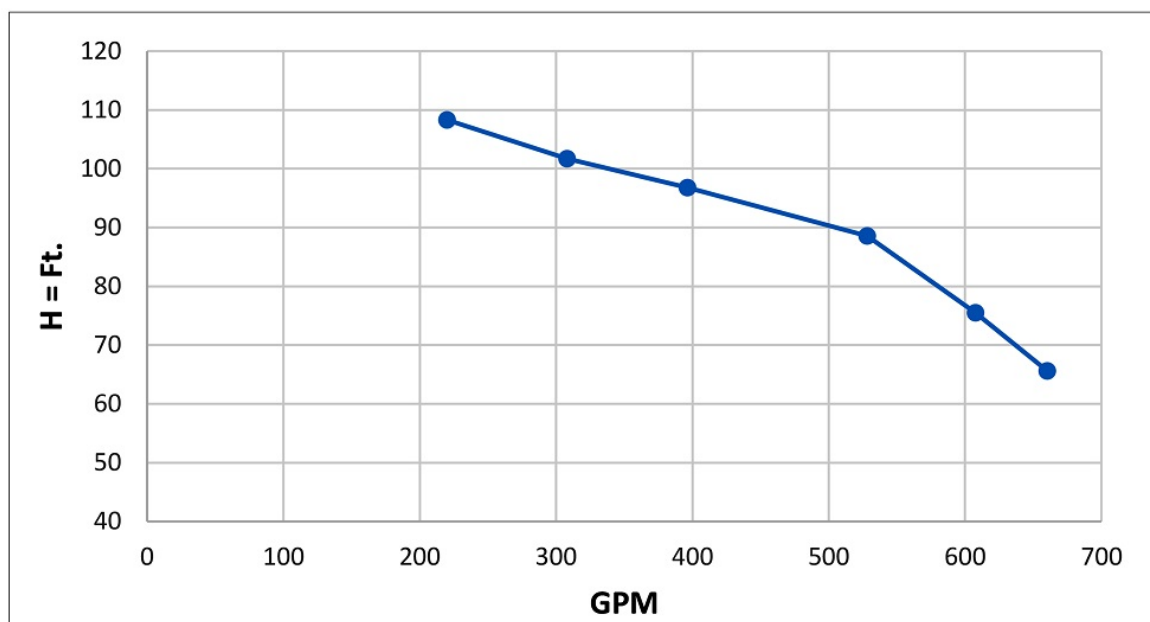

Parts List and Materials:

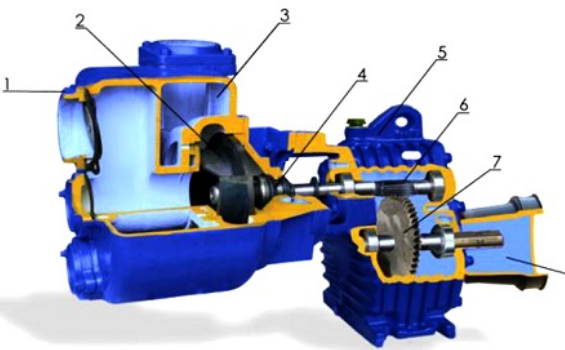

Parts List	Material
1 SUCTION COVER	Grey fine grained cast iron
2 IMPELLER	Grey fine grained cast iron
3 PUMP CASING	Grey fine grained cast iron
4 MECHANICAL SEAL	Or packing gland
5 GEAR BOX	Grey fine grained cast iron
6 PINION	Cemented and tempered steel
7 DRIVING WHEEL	Cemented and tempered steel
8 PROTECTION CARTER	Nylon

Project

Project ID

Created by

Created on

Last update