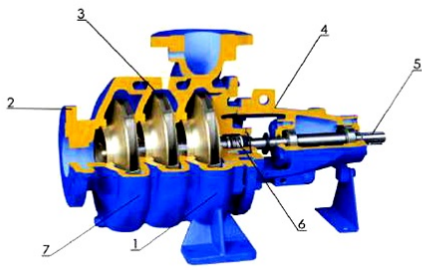


Modello Model	JCS-P1003AS										Centrifuga Centrifugal		Inlet in.	5
													Outlet in.	4

RPM	m ³ /h l/l'	0	66	72	78	84	90	96	102	105	120	138	150	165	180	195	210	225	240	
		0	1100	1200	1300	1400	1500	1600	1700	1750	2000	2300	2500	2750	3000	3250	3500	3750	4000	
1450	H - m	132	129	127	123	121	120	118	116	114	110	107	104	101	98	96	93			
	Kw	44,7	44,7	49,2	56,7	60,4	63	64,9	67,1	69	70,8	76	80,5	80,8	81	81,2	81,3			
1750	H - m	184	184	184	183	183	182	182	181	181	180	176	172	169	167	162	158	153	148	
	Kw	79,8	79,8	79,8	79,8	79,8	79,8	82	83	85,7	91,7	98,4	106	112	116	120	123	135	140	

Versioni disponibili - Available version	Girante - Impeller
--	--------------------

	Parts List	Material
	1 PUMP CASING 2 SUCTION COVER 3 IMPELLER 4 SUPPORT 5 SHAFT 6 MECHANICAL SEAL 7 DIFFUSER	Grey fine grained cast iron Grey fine grained cast iron Grey fine grained cast iron Grey fine grained cast iron Steel 38NCD4 Grey fine grained cast iron Grey fine grained cast iron
* for not corrosive liquids		

Girante prim. - Prim. Impeller Diametro - Diameter in.	16.5
Apertura - Opening in.	0.6
Girante sec. - Sec. Impeller Diametro - Diameter in.	13
Apertura - Opening in.	0.6
Numero stadi Stage no.	3
Peso lb. Weight lb.	682



Immagine a scopo illustrativo
Images for illustrative purpose only

Modello
Model

JCS-P1003AS

Centrifuga
Centrifugal

Inlet in. 5

Outlet in. 4

Curva prestazioni - Performances curve

