

Modello <i>Model</i>		JCS-P1002AS									Centrifuga <i>Centrifugal</i>								Inlet in.		5	
																			Outlet in.		4	
RPM	m³/h	0	66	72	78	84	90	96	102	105	120	138	150	165	180	195	210	225	240	255	270	
	l/l'	0	1100	1200	1300	1400	1500	1600	1700	1750	2000	2300	2500	2750	3000	3250	3500	3750	4000	4250	4500	
1450	H - m	95	94	93	90	89	88	87	85	83	79	78	76	75,5	75	74	73					
	Kw	33,5	33,5	35,8	41,8	44,7	46,5	47,7	50,7	53	55,2	57	58,2	58,5	58,7	58,8	58,9					
1750	H - m	137	137	137	136	136	135	135	134	133	131	128	126	123	121	118	115	110	108			
	Kw	58,9	58,9	58,9	58,9	58,9	58,9	65,5	67	68,6	68,6	73,1	77,5	81,3	87,2	91,7	96,2	98,4	101			
2000	H - m	177	177	177	177	176	176	175	174	173	171	170	168	165	160	158	153	150	147	143	136	
	Kw	85,7	85,7	85,7	85,7	85,7	85,7	85,7	88,5	89,5	93,9	101	105	113	119	126	130	136	142	148	149	

Versioni disponibili - Available version

Girante - Impeller

Girante prim. - *Prim. Impeller*
Diametro - *Diameter lb.* **16.5**


Apertura - *Opening lb.* **0.6**

Girante sec. - *Sec. Impeller*
Diametro - *Diameter lb.* **13**

Apertura - *Opening lb.* **0.6**

Numero stadi
Stage no. **2**

Peso lb.
Weight lb. **572**

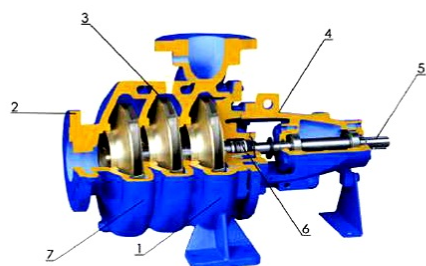

Parts List

Material

1 PUMP CASING	Grey fine grained cast iron
2 SUCTION COVER	Grey fine grained cast iron
3 IMPELLER	Grey fine grained cast iron
4 SUPPORT	Grey fine grained cast iron
5 SHAFT	Steel 38NCD4
6 MECHANICAL SEAL	
7 DIFFUSER	Grey fine grained cast iron

** for not corrosive liquids*



Immagine a scopo illustrativo
Images for illustrative purpose only

Modello
Model

JCS-P1002AS

Centrifuga
Centrifugal

Inlet in. 5

Outlet in. 4

Curva prestazioni - Performances curve

