

Modello <i>Model</i>		JCS-P652A2S										Centrifuga <i>Centrifugal</i>						Inlet in.	3
																		Outlet in.	2.5
RPM	m³/h	0	27	30	33	36	39	42	48	54	63	72	75	81	87	93			
	l/h	0	450	500	550	600	650	700	800	900	1050	1200	1250	1350	1450	1550			
1450	H - m	37	35	34	33,7	33	32,1	31	28	27	19								
	Kw	4,8	4,8	5,2	5,7	6	6,1	6,3	6,7	7,1	7,5								
1750	H - m	54,3	52,3	52	51,7	51	50,6	49	47	44	39								
	Kw	7,8	7,8	8,2	8,6	8,9	9,3	9,7	10,4	11,2	11,9								
2000	H - m	71	70	69	68,4	67	66,6	66	64	61	56	50							
	Kw	11,3	11,3	11,3	11,6	12,7	12,9	13,4	14,5	15,7	16,8	17,9							
2200	H - m	86	85	84	83,7	83	82,7	82	80	77	72	67							
	Kw	14,9	14,9	14,9	15,3	16	16,4	17,1	18,6	19,4	20,9	22,7							
2400	H - m	101	101	100	99,5	99	98,6	98	96	95	90	84	82	78					
	Kw	19,4	19,4	19,4	19,4	19,4	20,1	20,9	22,4	23,9	26,1	27,6	28,5	29,1					
2600	H - m	118	118	118	117	117	117	116	114	112	108	103	101	96	92				
	Kw	25,3	25,3	25,3	25,3	25,3	25,3	25,3	27,6	29,1	31,3	33,5	34,7	35,8	37,3				
2900	H - m	148	148	148	147	147	147	146	144	143	140	135	132	128	124	118			
	Kw	33,5	33,5	33,5	33,5	33,5	33,5	33,5	35,8	38	41	43	44	46,2	47,7	50			

Versioni disponibili - Available version

Girante - Impeller

Girante prim. - *Prim. Impeller*

Diametro - *Diameter in.*

10

Apertura - *Opening in.*

0.4

Girante sec. - *Sec. Impeller*

Diametro - *Diameter in.*

8

Apertura - *Opening in.*

0.5

Numero stadi


Stage no.

2

Peso lb.

Weight lb.

158

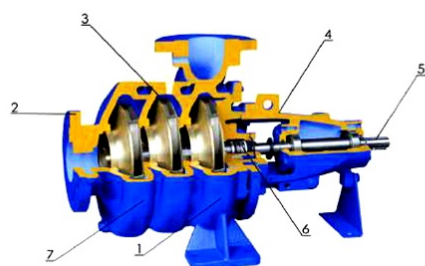

Parts List

Material

1 PUMP CASING	Grey fine grained cast iron
2 SUCTION COVER	Grey fine grained cast iron
3 IMPELLER	Grey fine grained cast iron
4 SUPPORT	Grey fine grained cast iron
5 SHAFT	Steel 38NCD4
6 MECHANICAL SEAL	
7 DIFFUSER	Grey fine grained cast iron

* for not corrosive liquids



Immagine a scopo illustrativo

Images for illustrative purpose only

Modello
Model

JCS-P652A2S

Centrifuga
Centrifugal

Inlet in. 3

Outlet in. 2.5

Curva prestazioni - Performances curve

